



JEMStar II High Accuracy Revenue Meter

FOR GENERATION, TRANSMISSION, AND INDUSTRIAL POWER MEASUREMENT



HIGH ACCURACY REVENUE METER


AMETEK's JEMStar II has the highest accuracy in the market, provides many communication options and monitors your power quality to make it the ideal choice for any metering application. An impressive color display makes it easy to view power measurements, phasor displays and meter diagnostics. The JEMStar II is easy to use and configure with our intuitive JEMWARE software and the meter display provides a user menu to show and edit configuration details. The JEMStar II has 8 GB of non-volatile memory to store your metering and power quality data for as long as you want. The meter has a single base model that can be used for simple revenue and billing applications as well as more complex power quality monitoring applications.

High Accuracy

These meters are your cash register and even fractions of a percent accuracy can mean the difference of hundreds of thousands of dollars. The JEMStar II's precision design provides high accuracy with long term stability making it easy to guarantee our 0.05% accuracy for 10 years. Low current accuracy is better than 0.2% RDG at 50 mA.

Meter Security

The JEMStar II includes security features that satisfy NERC CIPS requirements. Username and password combinations are required to access your secure data and configuration details. The meter communications are password protected to prevent unauthorized access. Ethernet connections can be restricted to select IP addresses. Audit logs store all access attempts; including meter connection, configuration, firmware changes and data access with username and time/date for each occurrence. The audit log requires permission to view and cannot be modified or deleted from the meter.

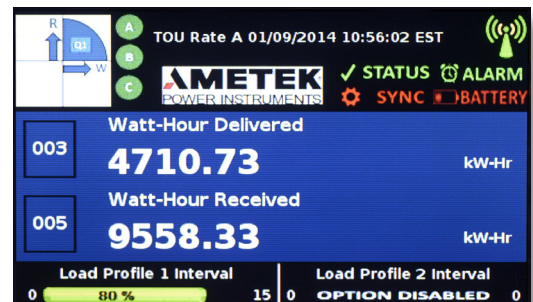

FEATURES AND BENEFITS

- High accuracy
- Easy to configure and operate
- Advanced communications
- NERC CIPS compliance
- Power quality
- Graphic color display and user menu



Ease of Use

The JEMStar II is easy to configure with AMETEK’s intuitive JEMWARE Software that includes a Configuration Wizard which guides you through the necessary set-ups for your metering application. The meter display has a User Menu which displays configuration details without using a PC. Some configuration details can be edited once you provide the necessary password access. The meter includes a built-in USB port that can be used to upload or download meter configurations, upload firmware or retrieve metering data using a simple USB memory stick.

Communications

The JEMStar II can be supplied with up to eight communication ports including:


- Optical port
- (3) Serial ports – RS-232 and RS-485
- Analog or Cellular Modem port
- (2) Ethernet ports
- WIFI port

Communication ports support a variety of metering protocols including DNP, Modbus, JEM Binary, ANSI Tables and IEC-61850. All ports can operate simultaneously and independently.



Tracking the port status and protocol selections is simplified with our graphical ‘heads-up display’ showing which ports are installed and configured, which ones are in use and which ones require attention. The ‘heads-up display’ can also be viewed remotely on our JEMWARE Software.

The dual independent Ethernet ports have separate IP Addresses so that end users can allow access to third parties without breaching their own secure network. Each Ethernet port can be addressed for multiple users and protocols operating simultaneously with permissions given to specified functions.

Switch Board Meter (Rear View)

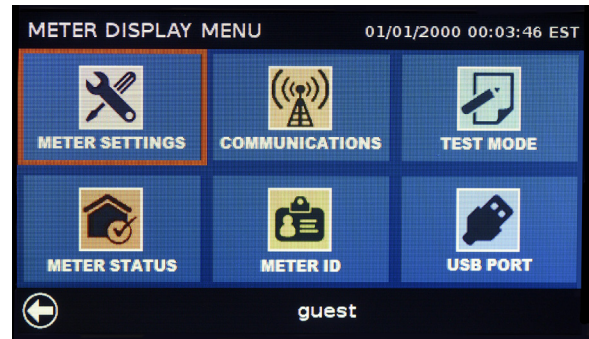


User Display Menus

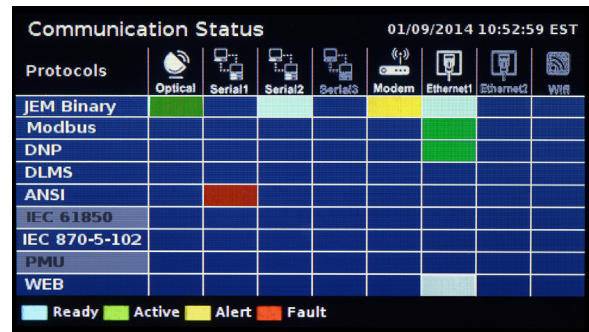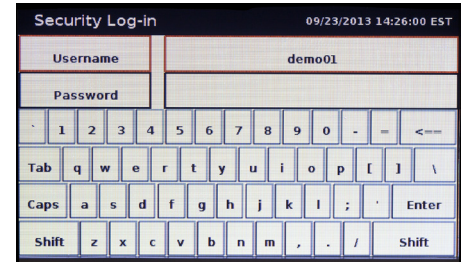

Communications Heads-up Display

Phasor Diagram

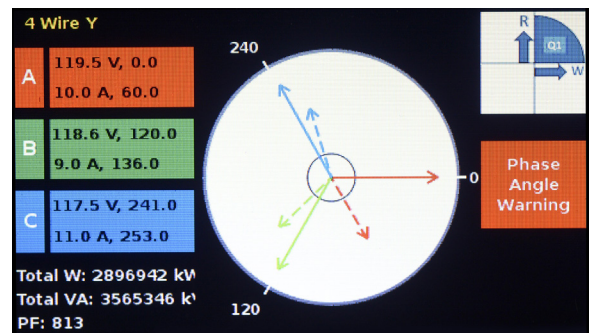

Site Monitoring

Metering wiring connections can be checked at the meter via a color phasor diagram and alert you when wiring is mis-connected or phase angles exceed pre-set limits.

The JEMStar II can be configured with alarm triggers on any power measurement, analog or digital I/O. Triggered events are always available for remote retrieval and triggers can activate power quality recording, generate an email notification or alarm an output contact.

Power Quality

The JEMStar II comes equipped with Sag/Swell/Outage recordings that store the time, date, duration and site conditions. For advanced power quality analysis, there is an option to record high speed RMS measurements and waveform data from pre-selected triggers. Waveform data is selectable for 1kHz and 16kHz recording rates with durations lasting up to 16 seconds. Individual harmonics up to the 128th can be recorded for magnitude and phase angle as well as Flicker and long term voltage availability. Power quality data can be transmitted directly from the meter in a PQ Dif file format for easy analysis with our analysis software or third party applications. Power quality data can also be recorded and displayed in various standard formats including EN50160, CBEMA and ITIC.

WEB Connectivity

The JEMStar II can be equipped with a password protected WEB server that can be used to display real time measurements and metering events on any standard WEB browser. The WEB display can be customized to select specific measurements, show historical load profile data and real time measurements. The meter can be set up for email alarm notifications from pre-selected triggers.

Metering Features and Functions

The JEMStar II has 50 normal and 50 alternate registers that can be shown on the graphical display, listing 1-4 measurements per display screen. The meter can be provided with two independent load profile groups, each with 16 channels at intervals of 1 to 60 minutes. Measurements can be stored in scalable counts or 32 bit engineering units. For additional measurement logging, the meter can record up to 50 different power measurements in two independent logs each with their own recording interval. Logs can be used for short or long term trending of energy values, min/max/avg power measurements and harmonics up to the 128th.

The meter comes with 8GB of non-volatile memory for storing Load Profile, Measurement Logs and Power Quality Data, providing ample space for all.


Input/Output Capability

The JEMStar II can be equipped with an internal six channel digital I/O and a four channel analog output module. Each digital I/O channel can be selected as either an input or output and has a built-in isolated supply to provide power for inputs. Additional digital I/O and analog inputs can be provided external to the meter.

Power Quality Recordings

Sag/Swell/Outage (standard)	<ul style="list-style-type: none"> Record Event Time, Date, Duration Record min/max/avg V, A, Pf, THD Max 500 events
High Speed RMS (optional)	<ul style="list-style-type: none"> Record voltage and current per phase 120 Hz recording rate: max 500 records Configurable trigger: pre and post event recording, max 60 second recording per event
Waveform Capture (optional)	<ul style="list-style-type: none"> Record voltage and current per phase 1kHz recording rate: max 500 records 16 kHz recording rate: max 64 records Configurable trigger: pre and post event recording, max 16 second recording per event
Harmonic Recording (optional)	<ul style="list-style-type: none"> Record individual voltage and current harmonic per phase up to 128th Record magnitude and phase angle Recording interval: 1-60 min
Flicker Measurement (optional)	<ul style="list-style-type: none"> Pst and Plt

Web Browser Display

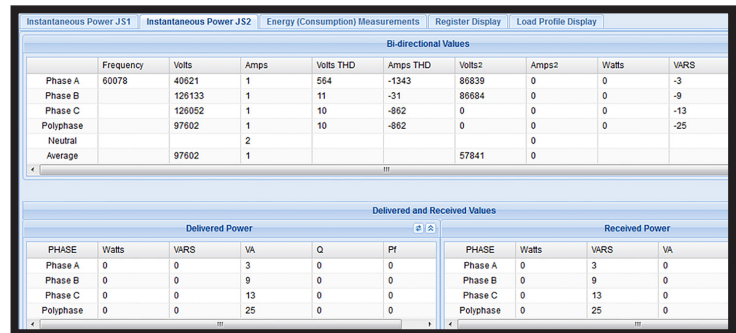

Flexible Design

The JEMStar II is equipped with a wide range current and voltage input that can be supplied in a universal form to handle any three phase Delta or WYE application. The meter can be provided in a switchboard, A-Base and several retrofit packages for easy plug and play replacement of many legacy meters. The meter can be easily field upgraded for any option, including power quality recording making it a universal fit for any application.

Time Synchronization

The meter clock can be synchronized from it's own high accuracy temperature compensated source or externally synchronized to the AC frequency, IRIG-B, NTP, IEEE-1588 and PPS inputs depending on your application requirements.

SPECIFICATIONS

METER FORMS

- Meter Forms: 5, 6, 8, 9, 45, Universal

INPUTS

Voltage

- 55-530 VAC auto-ranging
- Burden*: 0.5 VA @ 530V
- * Does not include auxiliary power requirements.

Current

- 1 Amp: ANSI Class 2
- 5 Amps: ANSI Class 10
- 10 Amps: ANSI Class 20
- Burden: 0.5 VA maximum
- Overload: 1.5x rated class current continuous
- Starting current: 0.002 A
- Frequency range: 45-55 Hz, 55-65 Hz

AUXILIARY POWER

S-base and A-base

- Self powered via all three phases: 55-530 VAC
- External Aux Power Option: 55 – 530 VAC or 90 – 300 VDC; 19-58 VDC

Switchboard

- Aux Power: 55 – 530 VAC or 90 – 300 VDC; 19-58 VDC option

Auxiliary Power Burden

- 25 VA maximum

ACCURACY

Watt Hour

- 0.05% reading (0.02% typical)

Volts, Amps

- 0.04% reading

MEASUREMENTS

- Bi-directional, 4 quadrant
- Energy, instantaneous: per phase values
- Min/Max/Avg values
- Demand: Peak, Present, Past, Thermal and Coincident
- TOU: 8 rates/day, 4 season
- TLC, LLC: per Phase, delivered and received, transformer factors or % loss

Measurement Logging (optional)

- 2 groups x 50 channels
- Recording interval: 1-60 min

REGISTERS

- 50 normal, 50 alternate, 50 test

LOAD PROFILE

- 16 channels storage
- 1-60 minute intervals
- Values stored in scalable counts or 32 bit engineering units
- Optional second independent LP Group
- Max 225 days storage of: 32ch @ 15 min intervals per load profile group

TIME SYNC

- Internal clock: 0.5 sec/day accuracy
- 50/60HZ line frequency
- External time sync options: IRIG-B, NTP, IEEE-1588, PPS

OPTIONAL I/O

Internal I/O

- Digital I/O: 6 channel selectable as input or output. Isolated power supply for digital inputs
- Analog output: 4 channel; 0-1mA or 4-20mA

External I/O

- Digital I/O: 8 channel selectable as input or output.
- Analog input: 4 channel; 0-1mA or 4-20mA
- RS-485 connection to meter (max 4,000 feet)

Digital Input Rating

- Form A or KYZ
- Maximum voltage 40 VDC

Digital Output Rating

- Form A or KYZ
- Maximum open-circuit voltage: 200V DC or peak AC
- Maximum switching current: 50 mA

COMMUNICATIONS

8 Com Ports Available

Port 1: Optical (Standard)

- Type 2 – 19,200 baud

Port 2: RS-232 Serial (opt)

- User configurable: 300 to 38400 baud

Port 3: RS-232/485 Serial (opt)

- User selectable: RS-232/485
- User configurable: 300 to 38400 baud

Port 4: RS-232/485 Serial (opt)

- User selectable: RS-232/485
- User configurable: 300 to 38400 baud

Port 5: Internal Analog Modem (opt)

- 56K baud
- With optional phone home on power fail
- With optional RS-485 communication repeater

Port 5: Internal Cellular Modem (opt)

- CDMA: Verizon, Sprint
- GSM/GPRS: Cingular, AT&T, Rogers, T-Mobile
- Internal or external antenna

Port 6: Ethernet (opt)

- 100 BaseT, unshielded twisted pair
- DHCP or fixed IP address
- Up to 12 simultaneous connections
- WEB Server, Email notification

Port 7: Ethernet (opt)

- 100 BaseT, unshielded twisted pair
- DHCP or fixed IP address
- Up to 12 simultaneous connections
- WEB Server, Email notification

Port 8: WIFI (opt)

- Fixed IP address
- Up to 12 simultaneous connections

USB Port:

- Compatible w/ USB flash drives
- Upload/download configuration
- Upgrade firmware
- Retrieve meter data

Communication Protocols

- Modbus RTU, Modbus TCP/IP (Master and Slave)
- DNP 3.0
- ANSI tables
- IEC 61850 (opt)
- JEM binary

METER DISPLAY

- 4.3" color graphic LCD
- Registers, Phasor diagram, diagnostics
- User menu configuration

MECHANICAL

Case Styles

- Socket connected (S-base), small switchboard case, bottom connected (A-Base), meter retrofits (JEM-2 and others)

Size and Weight

- S base: 5.5 pounds
- A-base: 7.5 pounds
- Switchboard: 11.5 pounds

ENVIRONMENT

Operating Temperature

- -22° to 185°F (-30° to 85°C)

Storage Temperature

- -40° to 185°F (-40° to 85°C)

Humidity

- 5 to 95% relative humidity, non-condensing

ELECTRICAL STANDARDS

Fast Transient

- IEC 61000-4-4

Radiated/Conducted Emissions

- IEC 61000-4-3, IEC-61000 4-6

Surge Immunity

- IEC 61000-4-5

Electrostatic Discharge

- IEC 61000-4-2

Surge Withstand (SWC)

- IEEE Standard C37.90.1

AGENCY STANDARDS

- ANSI Standard C12.20-2010
- FCC Part 68, FCC Part 15
- IEC61000-4-30-2008
- EN50160



For Customer Support

AMETEK Power Instruments
255 North Union Street
Rochester, NY 14605
Tel: +1 585.263.7700
Fax: +1 585.454.7805
power.sales@ametek.com

U.S.A. Headquarters

AMETEK Power Instruments
50 Fordham Road
Wilmington, MA 01887
Tel: +1 978.988.4903
Fax: +1 978.988.4990
www.ametekpower.com
power.sales@ametek.com

European Headquarters

Unit 21 Suite 6, Ridgeway
Donibristle Industrial Estate
Dunfermline
Fife, Scotland KY11 9JN, UK
Sales: +34 672.729.762
Fax: +44 1383.825715
power.sales@ametek.com

Asia Pacific Headquarters

No. 43 Changi South Avenue 2
#04-01
Singapore 486164
Tel: +65 6484.2388
Fax: +65 6481.6588
sales@ametekasia.com

AMETEK Instruments India Pvt. Ltd.

1st Floor, Prestige Featherlite Tech Park
Plot 148, EPIP Phase II
Whitefield, Bengaluru 560 066
Tel: +91 80.67823252
Fax: +91 80.67823232
powersales.india@ametek.com

